



Symaro™

- 
- - AC 24 V DC 13.5...35 V
  - DC 0...10 V 4...20 mA
- 

- 
- - 
  -
- 

|  |          |        |                                   |             |
|--|----------|--------|-----------------------------------|-------------|
|  |          |        |                                   |             |
|  | G ½ A 1) | 100 mm | AC 24 V ±20 % /<br>DC 13.5...35 V | DC 0...10 V |
|  | G ½ A 1) | 150 mm | AC 24 V ±20 % /<br>DC 13.5...35 V | DC 0...10 V |
|  | G ½ A 1) | 100 mm | DC 13.5...35 V                    | 4...20 mA   |
|  | G ½ A 1) | 150 mm | DC 13.5...35 V                    | 4...20 mA   |

1) 2008.4.1

---

DC 0...10 V    4...20 mA


---

山

山

DC 0...10 V    4...20 mA

山

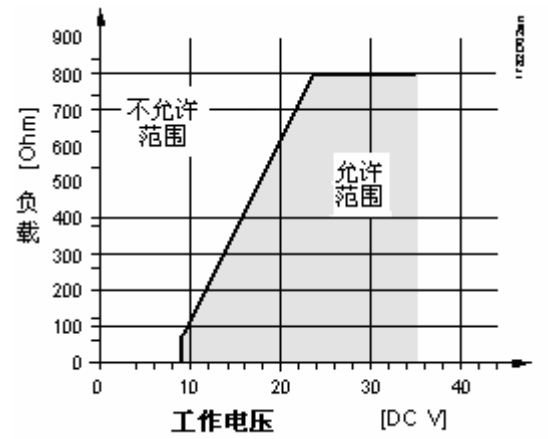

山

山

山



|  |     |                                                                           |
|--|-----|---------------------------------------------------------------------------|
|  |     | “ ”                                                                       |
|  |     | 50/60 Hz AC 24 V                                                          |
|  |     | ≤1 VA                                                                     |
|  |     | 10...+120 °C (R2 = ),<br>0...100 °C (R1), 0...70 °C (R3)                  |
|  |     | “ ”                                                                       |
|  |     | Pt 1000 class B DIN EN 60 751                                             |
|  |     | 30 s 2 m / s<br>8 s 2 m / s                                               |
|  |     | 0...70 °C ±1 K<br>-40...+120 °C ±1.4 K                                    |
|  | U1  | DC 0...10 V $\hat{=}$ -10...+120 °C ( )<br>0...100 °C 0...70 °C,<br>±1 mA |
|  | I1  | 4...20 mA $\hat{=}$ -10...+120 °C ( )<br>0...100 °C or 0...70 °C          |
|  |     | PN 16                                                                     |
|  |     | IP 54 IEC 529                                                             |
|  |     | III EN 60 730                                                             |
|  |     | 1 x 2.5 mm <sup>2</sup> 2 x 1.5 mm <sup>2</sup>                           |
|  | ( ) | M 16 x 1.5                                                                |
|  |     | IEC 721-3-3<br>class 3K5<br>-40...+70 °C<br>5...95 % r.h.                 |
|  |     | IEC 721-3-2<br>class 2K3<br>-25...+70 °C<br><95 % r.h.<br>class 2M2       |
|  |     | , RAL 7001 ( )                                                            |
|  |     | , RAL 7035 ( )                                                            |
|  |     | DIN 17 440 1.4571                                                         |
|  |     | PA, RAL 7035 ( )                                                          |
|  |     |                                                                           |
|  |     |                                                                           |

|                                                                                       |                                |
|---------------------------------------------------------------------------------------|--------------------------------|
|                                                                                       | EN 60 730-1                    |
|                                                                                       | EN 61 000-6-2<br>EN 61 000-6-3 |
| CE- CE                                                                                | EMC Directive 2004/108/EC      |
|  EMC | 1992<br>AS/NZS 3548            |
| UL UL                                                                                 | UL 873                         |
| QAE2164.010                                                                           | 0.14 kg                        |
| QAE2164.015                                                                           | 0.16 kg                        |
| QAE2174.010                                                                           | 0.14 kg                        |
| QAE2174.015                                                                           | 0.16 kg                        |

